


8 – 15” MOUNTING CLIPS INSTALLATION INSTRUCTIONS


P/N EA-BRK-2 (PK OF 8)




NOTE: EA-BRK-2 IS COMPATIBLE WITH EA7 SERIES TOUCH PANELS ONLY. EA-BRK-2 WILL NOT FIT EA9 SERIES PANELS

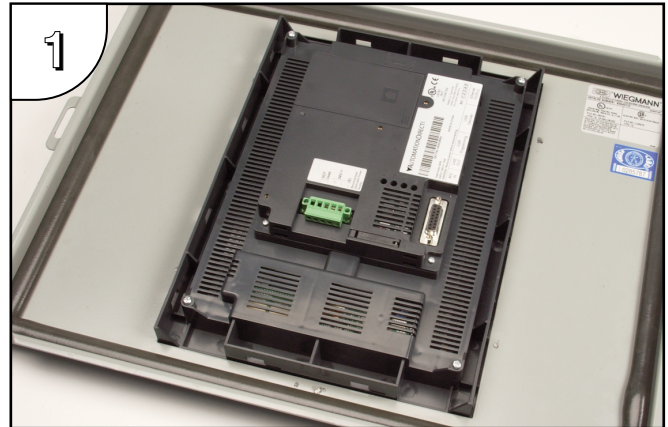


1
Position the touch panel through the cutout in the control cabinet door and hold in place. The mounting clips are positioned into the slots around the outside edge of the touch panel rear.

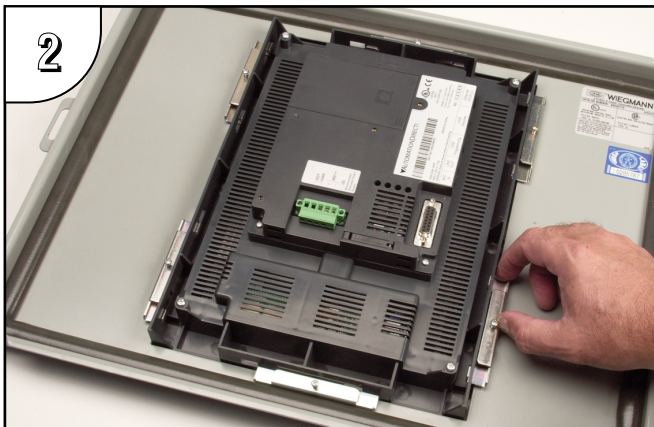

2
The mounting clips are positioned into the larger portion of the slot at two locations, and then slid toward the smaller portion of the slots to lock them in place. Some slots are arranged to slide to the left and others to the right.

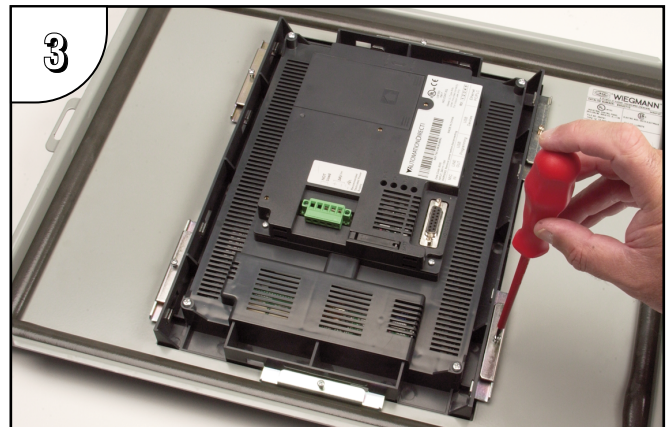

3
Tighten the mounting screw for each mounting clip in an alternating fashion at all clips while observing the front of the touch panel. The goal is to make sure the front bezel is pulled up against the enclosure sheet metal uniformly, and the touch panel gasket is fully compressed all the way around its perimeter. Tighten the screws to a torque rating shown in the table below. Avoid over-tightening the screws to the point that they start to deform or bend the mounting clip.

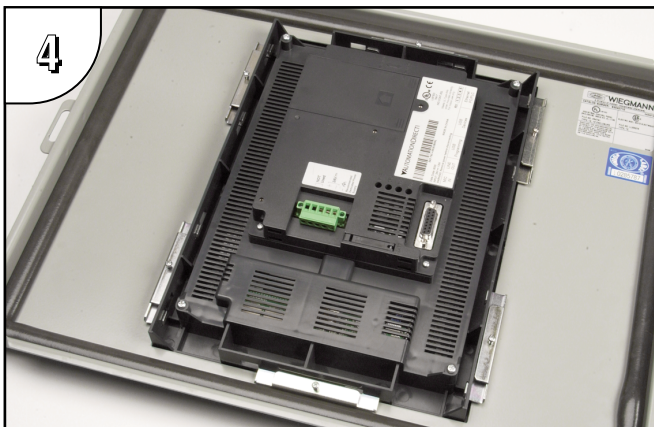

4
The above photo shows all mounting clips in place and the touch panel secured. The 8”, 10” and 12” touch panels require 6 mounting clips and the 15” touch panel requires 8 mounting clips.

Touch Panel Size	Enclosure Thickness Range	Mounting Clip Screw Torque
8”, 10”, 12” & 15”	0.039 - 0.20 inch [1 - 5 mm]	42 ~ 57 oz-in [0.3 ~ 0.4 Nm]